



ONTARIO • 1-833-9-REEFER

Brampton - Head Office
750 Intermodal Dr.
Brampton, ON L6T 0B5

Guelph
6 Winer Rd.
Guelph, ON N1H 6H9


Durham
1900 Boundary Rd.
Whitby, ON L1N 8P8

Cornwall
6249 Boundary Rd.
Cornwall, ON K6H 5R5

MARITIMES • 1-877-388-6777

Moncton
295 Macnaughton Ave.
Moncton, NB E1H 2S7

St. Johns
52 Bremigans Blvd.
Paradise, NL A1L 2E6

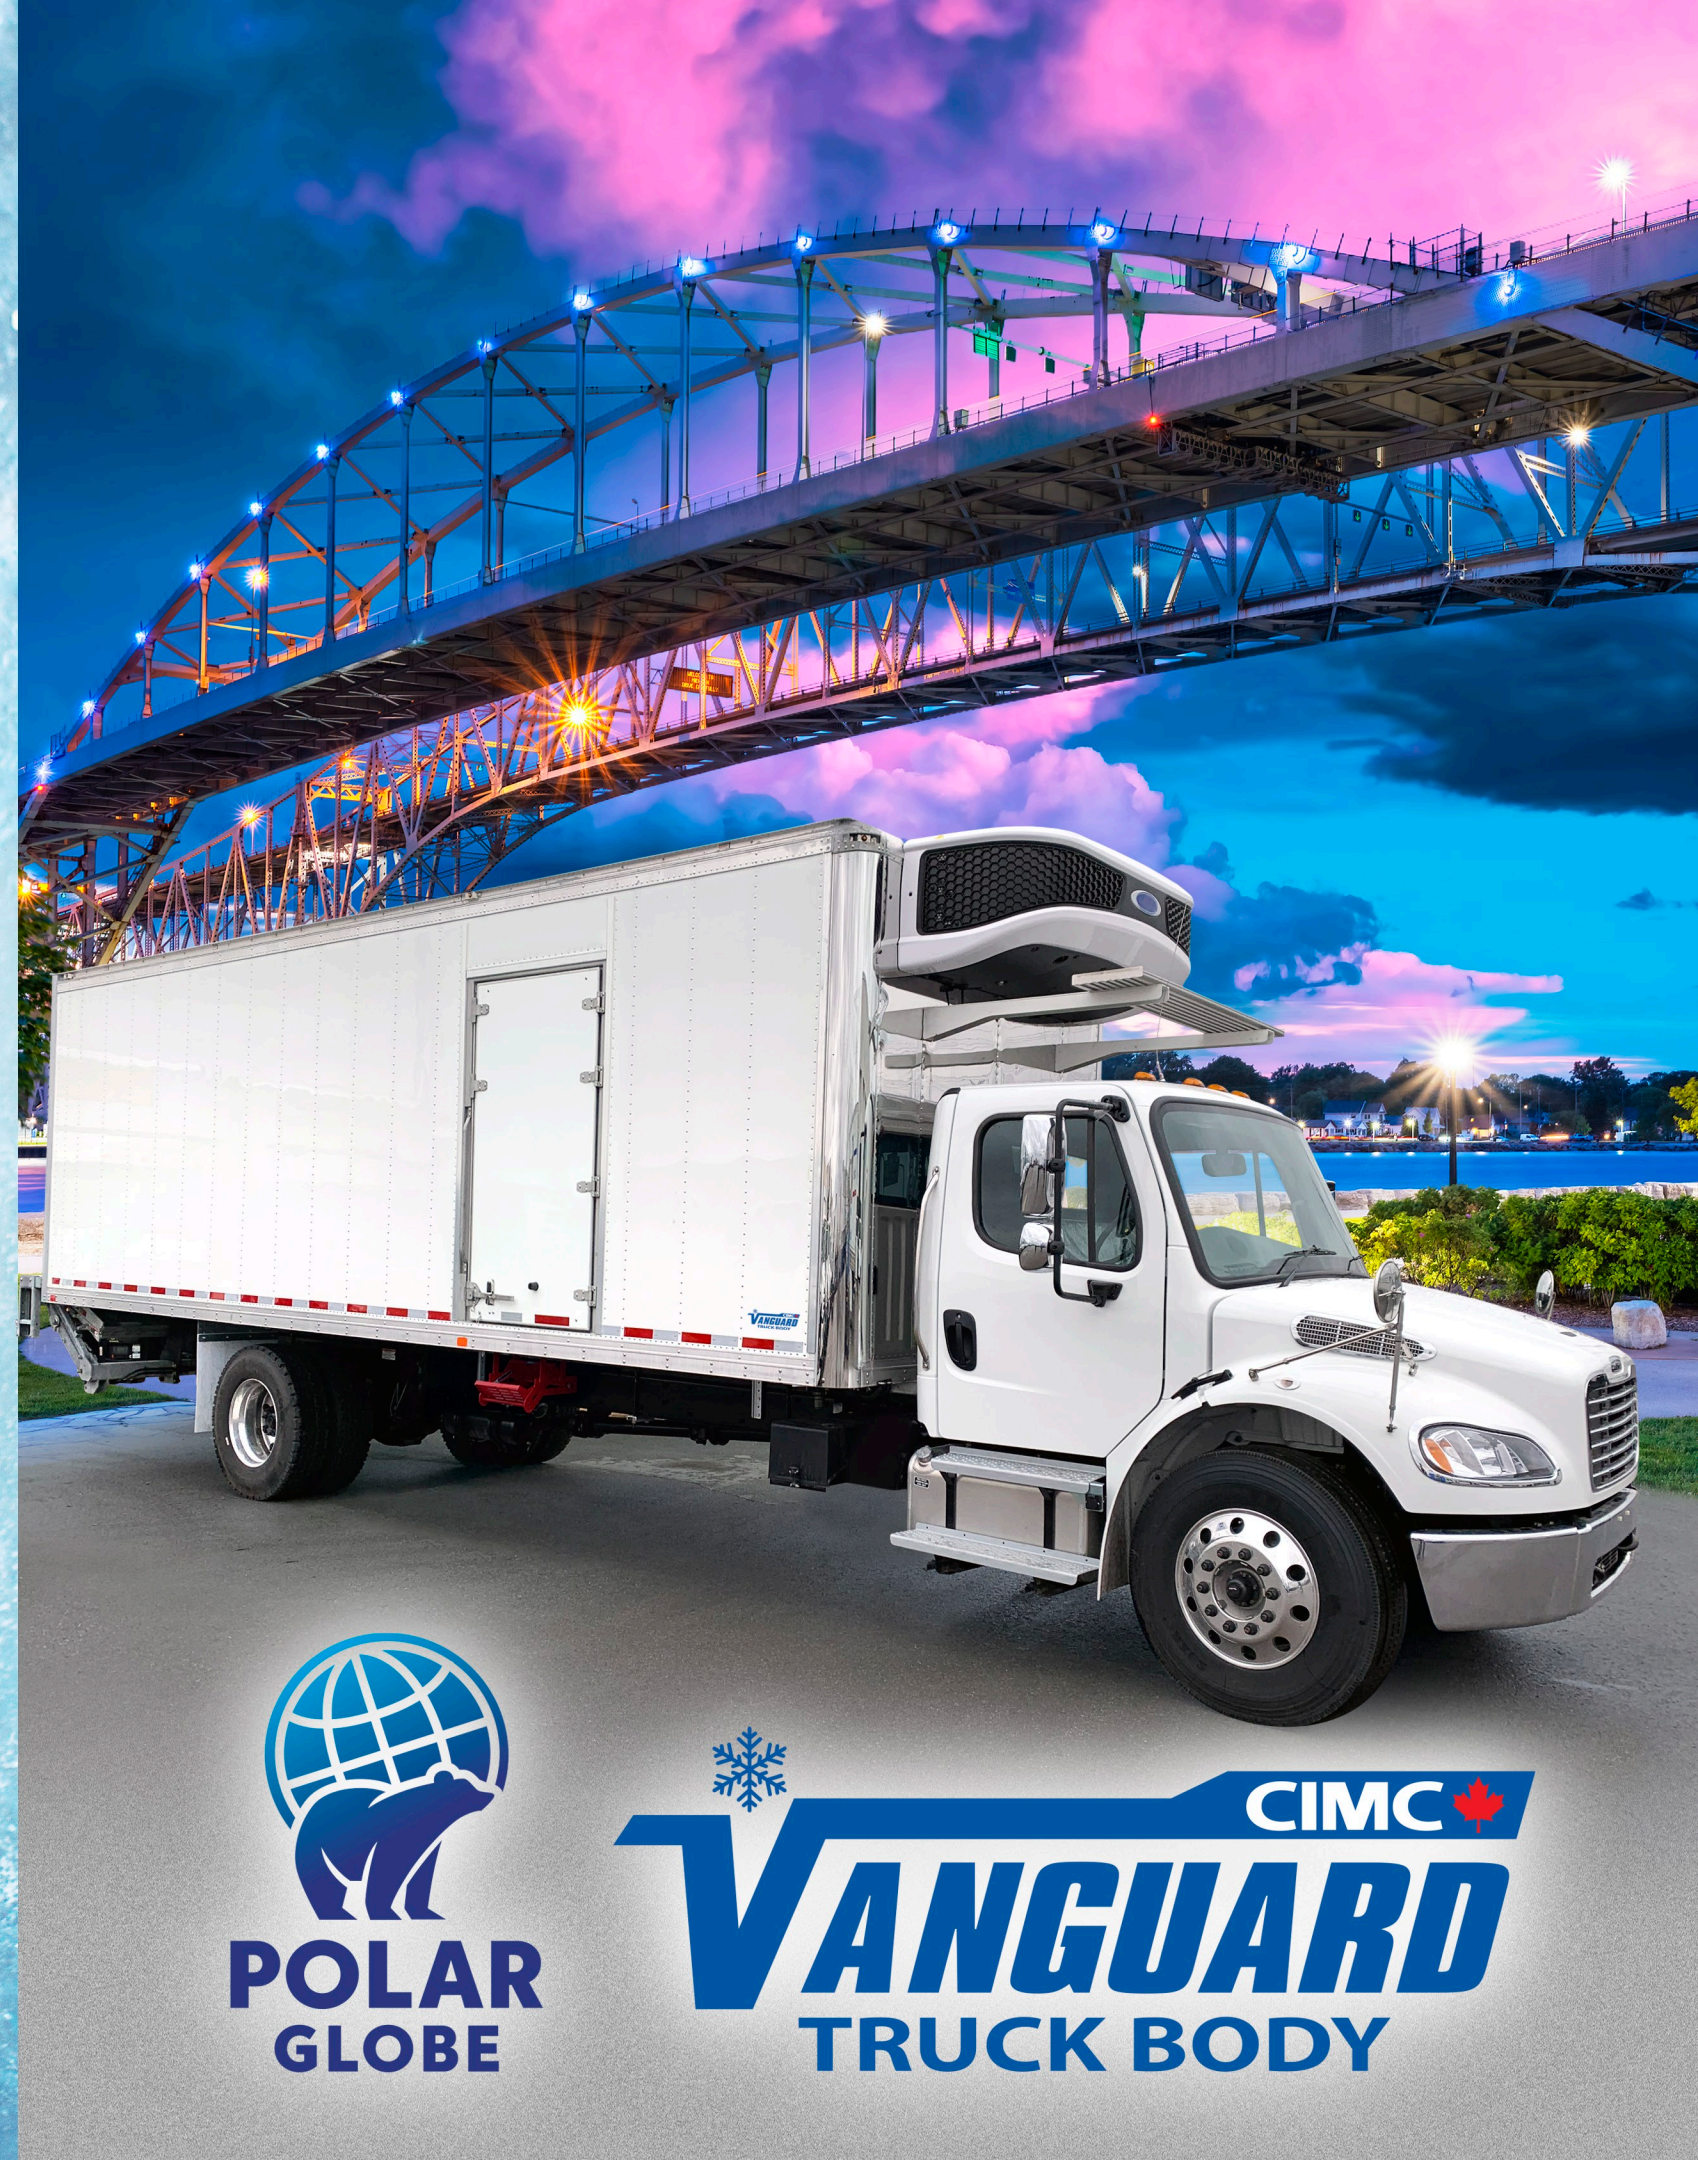




The unparalleled integrity
found in every Vanguard refrigerated trailer
is ingrained in our all-new cutting-edge

Polar Globe Refrigerated Truck Bodies from CIMC Vanguard

Developed and Built Exclusively
for the Canadian Market

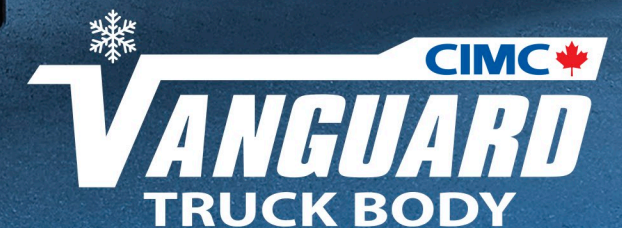

Standard Features



Vanguard Standard 4" Long Rails

SUBFRAME

- 3" cross members on 12" centers
- 4" long rail beams
- Mylar tape between cross members and bottom rails
- Added steel arched plates above the rear tire area.
- 0.040" one-piece composite plate over cross members

FLOOR

- 1.32" extruded aluminum Flat floor, knurled feature
- 2 front & 2 rear floor Drains with Kazoos
- Aluminum extrusion threshold flush to the rear
- 4" LBA foaming Polyurethane insulation

FRONT WALL

- 0.026" high glossy Stainless Steel outer skin, flat & riveted
- 0.08" Thermoplastic lining with anti-microbial feature
- Extruded aluminum top & bottom side rails
- Extruded aluminum Corner Posts
- Extruded aluminum scuff 12" high
- 4 Inch LBA foaming Polyurethane insulation
- Prep Support frame for the refrigeration unit
- (1) grab handle & (4) steps to stand on the catwalk for reefer servicing

SIDEWALLS

- 0.04" pre-painted white aluminum sheet riveted, post on 16" center
- 4 Inch LBA foaming Polyurethane insulation foamed in place
- Extruded aluminum top & bottom side rails
- 0.08" Thermoplastic lining with anti-microbial feature
- Extruded aluminum scuff 12" high

ROOF

- 0.04" one-piece Corrugated aluminum roof skin
- 4 Inch LBA foam Polyurethane insulation foamed in place

REAR FRAME

- Stainless steel rear frame for Roll-up door. With SST grab handles on each side.
- Bumper blocks

REAR DOOR

- Whiting Cold Saver 2-1/8" Roll up door, with inside safety release
- 36" high Stainless track protectors, on both sides



4inch Composite Stringer with Anti Slip Flooring

Available in numerous configurations and options, with sizes up to 30 feet.

THIS WILL BE THE **BEST** INVESTMENT YOU CAN MAKE FOR YOUR BUSINESS!




Standard Stainless Steel Front



Environmental LBA Blowing Agent

The latest advancement in insulation technology.

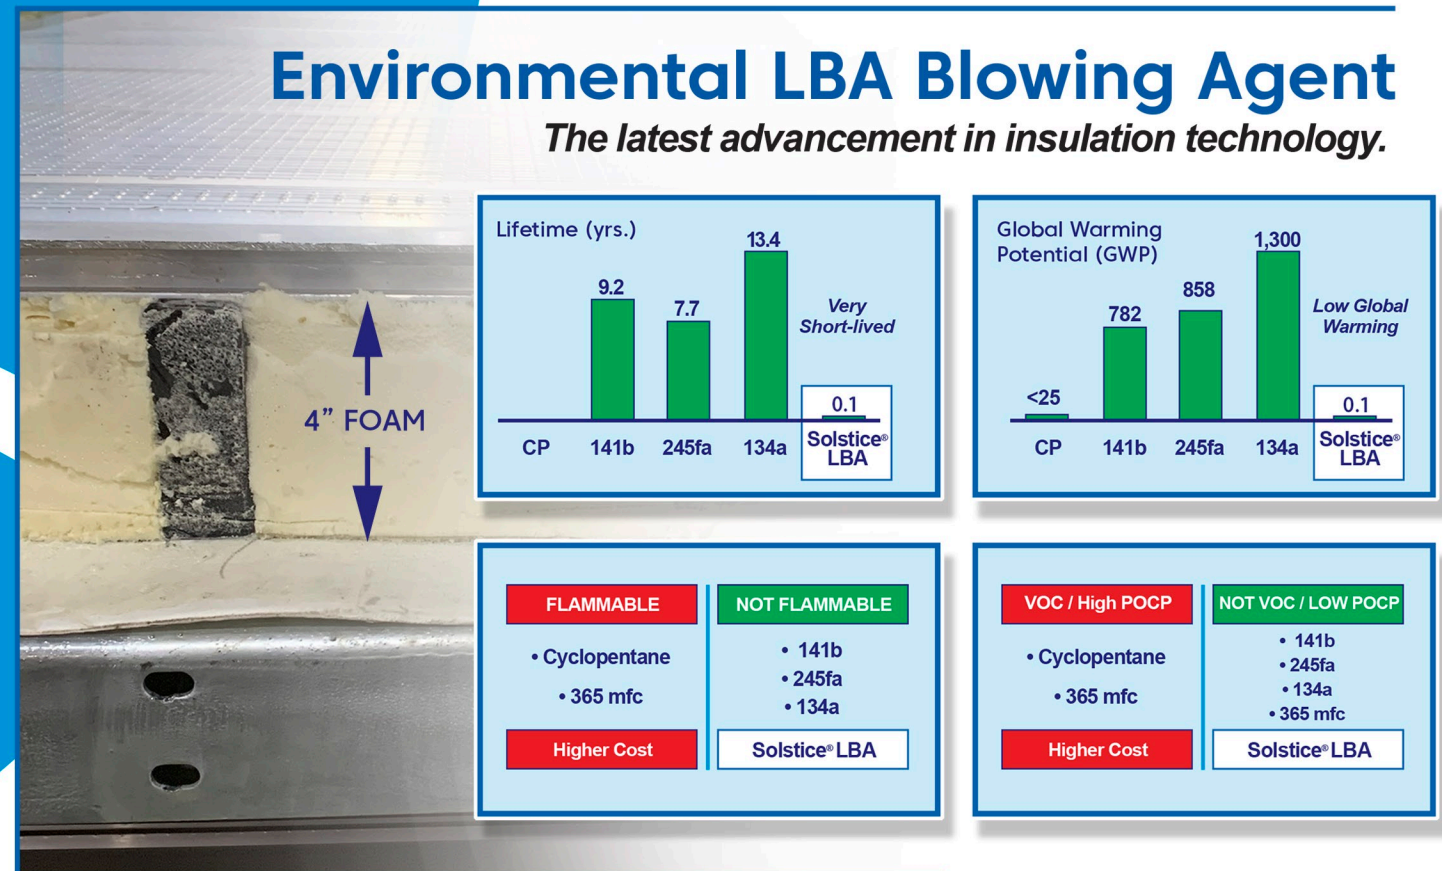



OPTIONS

- Various Floor Options
- One Piece Recessed Cargo Restraint system
- Side and rear door options
- Customized rear bumpers
- Various Scuff plate options
- Multi Temp Applications
- Walk Ramps
- Liftgates



Standard 5 Seal Door Casket on all side doors



We are committed to delivering what our customers need in today's demanding and ever-changing transportation industry.

